

# 3.5mm Ultra-slim High Bright Flexible Strip

## LED-ID35/IE35


### Features:

1. 3020,3014 high bright LEDs;
2. 3.5mm ultra-narrow, suitable for different installtion;
3. Three options: 78 LEDs/m(3020 LED),  
90 LEDs/m, 120 LEDs/m(3014LED);
4. Different single color, 12V DC, 3m/reel, IP20;
5. Each section can be cut;
6. TUV,CE,RoHS compliant.



### Application:

Suitable for advertising display, backlight,  
architecture decoration, indoor bar,  
dance hall, wine cabinet,  
floor, ceiling ,etc.

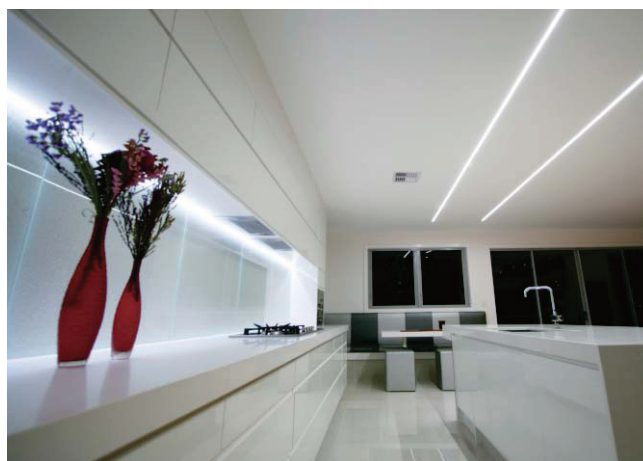


### Technical parameters :


Model	Width (mm)	Max. Length (m)	Min.Length (mm)	LED Type	LED Qty. (pcs/m)	DC Voltage (V)	Max. Power (w/m)	Luminous Flux (lm/w)
LED-ID35-W	3.5	3	12.8	3020	78	12	12.4	990
LED-ID35-NW								980
LED-ID35-WW								940
LED-IE35-90-W	3.5	3	11.11	3014	90	12	11.0	950
LED-IE35-90-NW								940
LED-IE35-90-WW								900
LED-IE35-120-W	3.5	3	8.3	3014	120	12	14.4	1200
LED-IE35-120-NW								1150
LED-IE35-120-WW								1100

## Dimension (Unit:mm):


### LED-ID35

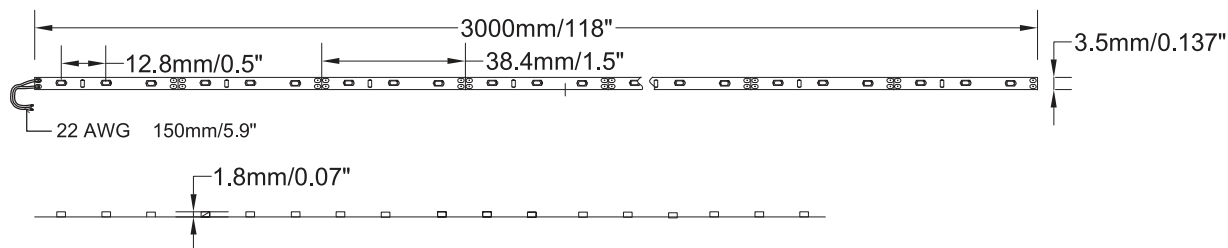

### LED-IE35-90

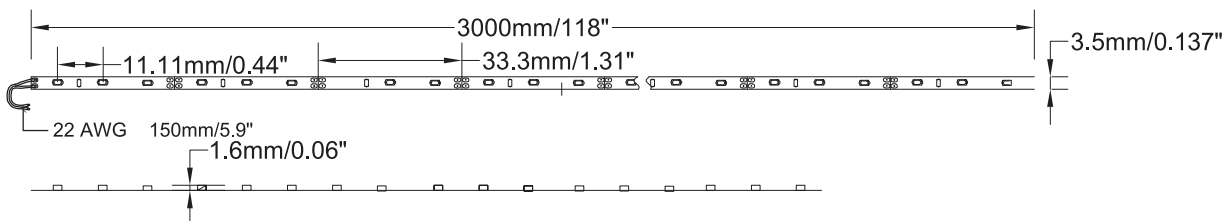

### LED-IE35-120

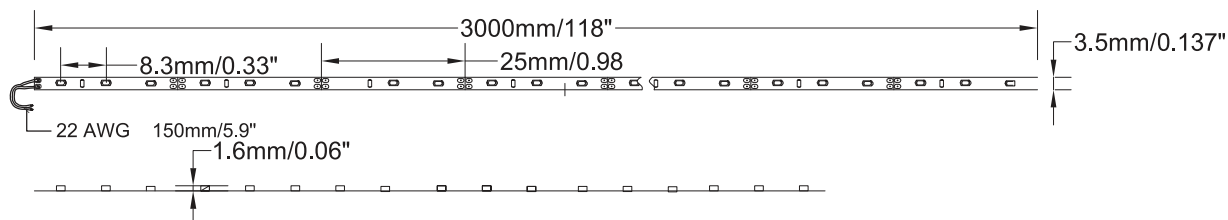

## ! Notice:

1. Install on flame-retardant surface with thickness >2mm;
2. Please read the specification carefully, make sure using environment conform to conditions in specification;
3. Please confirm input voltage before use, and disconnect power;
4. The serial connection length can't exceed 3 m;
5. Cut the strip according logo.